


PRODUCT SHEET

Product: WEBMASTER

Category: In-Line / ROTARY

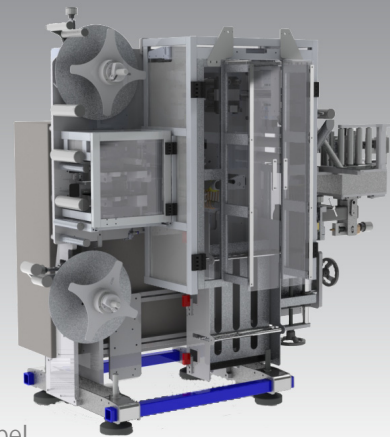

Non-stop Fully Automatic Self-adhesive Labelling Machine The Webmaster is designed to apply self-adhesive labels, splice the exhausted web onto the new reel in the run, and to automatically remove the waste reel and drop it into a waste bin, all can be achieved while operating at speeds of up to 700bpm. This allows the Webmaster to truly run non-stop while changing label reels and dumping the waste web. The Webmaster can be integrated into existing machinery. It has huge time saving advantages over interchange machines with only one labelling head per label to set-up where an interchange machine has two labelling heads per label. The Webmaster also allows easier operator access to the labelling heads compared with interchange machines



Automatic Splicing

The automatic splicing facility will allow the trailing edge of a label web to be joined to the leading edge of the next web. This will enable self-adhesive labels to run continuously without the need to stop for label reel changes.

The Webmaster operates in two modes - Automatic or Manual

Automatic mode

In automatic mode the splicing takes place with no operator intervention. The last label must be released from the core without any fastening material attached to the last label giving a clean label edge for splicing

Manual Mode - This mode is used with existing label stock.


In manual mode when the end of reel is detected, a predetermined amount of label web is dumped into the loop tray giving sufficient time for the operator to cut off the last label with the tap used to fasten the web to the core, this gives a clean edge for label splicing.

Automatic Waste Removal

The automatic waste removal facility will allow the waste carrier web to be bundled into a roll and removed / ejected automatically into a bin. The waste web is cut prior to ejection and automatically reattached to the ejection spindle for continuing operation. This function may be achieved at full speed or selectable at a reduced speed depending on label length.

Operator Interface - PLC

The Webmaster operates freestanding with its own PLC and screen. It handshakes with the product handling - Rotary or in-line concepts

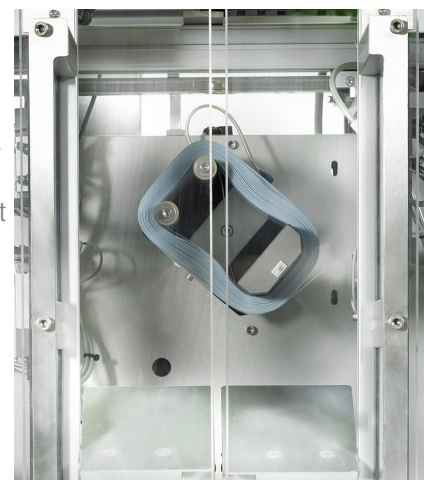

For more information Tel: 02 9736 8400 or
visit us on the web: www.impresstik.com

